


SMT Power Inductor


SILM418 Type

Features


- RoHS compliant.
- Low profile (1.8mm max. height) SMD type.
- Magnetically shielded, suitable for high density mounting.
- Self-leads, suitable for high density mounting.
- High energy storage and low DCR.
- Provided with embossed carrier tape packing.
- Ideal for power source circuits, DC-DC converter, DC-AC inverters inductor applications.
- In addition to the standard versions shown here, customized inductors are available to meet your exact requirements.



Mechanical Dimension:

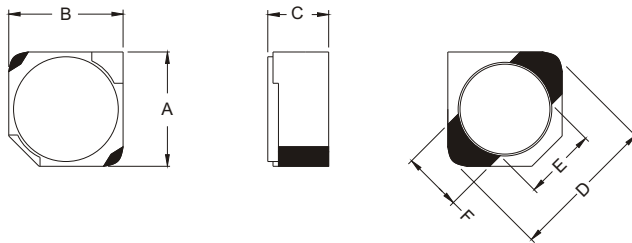


RECOMMENDED PAD PATTERNS

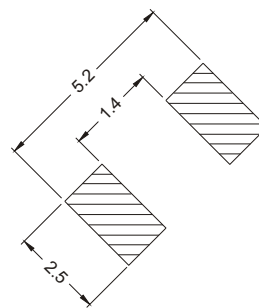

UNIT:mm/inch
 A = 3.8 / 0.150 Max.
 B = 3.8 / 0.150 Max.
 C = 1.8 / 0.071 Max.
 D = 4.5 / 0.177 Max.
 E = 2.4 / 0.094
 F = 1.5 / 0.059

Electrical Characteristics: 25°C: 100KHz, 0.1V

PART NO.	L ¹ (μH)	DCR (mΩ) MAX	I _{rated} ² (A _{dc})
SILM418 - 1R5	1.5	52	1.55
SILM418 - 2R2	2.2	72	1.20
SILM418 - 3R3	3.3	85	1.10
SILM418 - 4R7	4.7	105	0.90
SILM418 - 6R8	6.8	170	0.73
SILM418 - 100	10.0	210	0.55
SILM418 - 150	15.0	295	0.42
SILM418 - 220	22.0	430	0.35
SILM418 - 330	33.0	675	0.32
SILM418 - 470	47.0	850	0.24
SILM418 - 680	68.0	1360	0.22
SILM418 - 101	100.0	1650	0.17

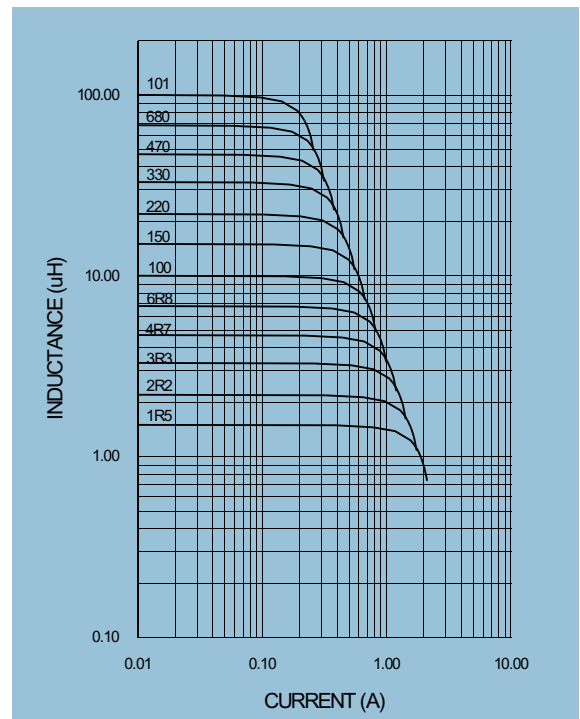

1. Tolerance of inductance: ±30%
2. I_{rated} is the DC current which cause the inductance drop 35% typical of its nominal inductance without current and the surface temperature of the part increase less than 45°C.
3. Operating temperature : -20°C to 105°C (including self-temperature rise).



DELTA ELECTRONICS, INC.

(TAOYUAN PLANT CPBG) 252, SAN YING ROAD, KUEISAN INDUSTRIAL ZONE, TAOYUAN SHIEN, 333, TAIWAN, R.O.C.

TEL: 886-3-3591968; FAX: 886-3-3591991

<http://www.deltaww.com>